




PLAN VIEW OF  
DETECTABLE WARNING AND WELL  
(PAVERS NOT DRAWN TO SCALE)

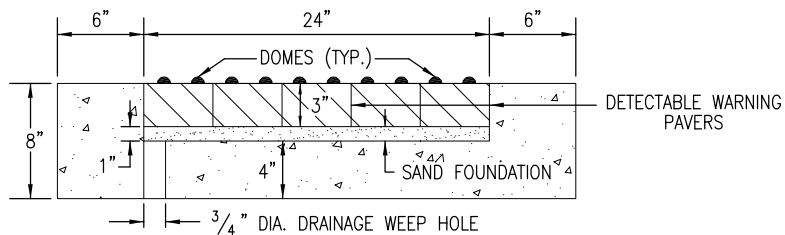

SECTION A-A

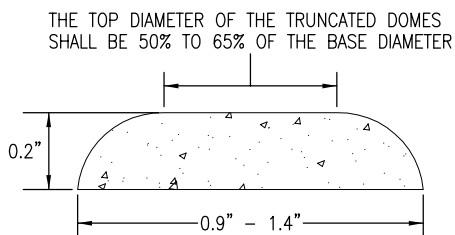

ELEVATION VIEW

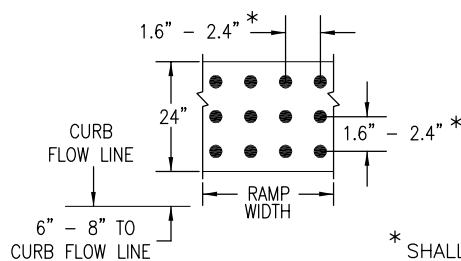

PLAN VIEW

\* SHALL BE  
EQUAL IN  
BOTH DIRECTIONS.

DOME AND DETECTABLE WARNING DETAILS

## GENERAL NOTES

1. THE DETECTABLE WARNINGS SHALL BE INSTALLED AT SIDEWALK/STREET TRNASITIONS. ADA MATS SHALL BE CAST IRON 'WET-SET' TYPE MANUFACTURED BY JORDAN IRON WORKS OR OTHER APPROVED MANUFACTURER.
2. THE TOP OF THE DRAINAGE WEEP HOLE SHALL BE LOCATED AT THE LOWEST POINT OF THE DETECTABLE WARNING WELL.
3. ALL DETECTABLE WARNING AREAS SHALL START A MINIMUM OF 6 INCHES FROM THE FLOW LINE OF THE CURB AND NOT BE MORE THAN A MAXIMUM OF 8 INCHES FROM ANY POINT ON THE FLOW LINE OF THE CURB. ALL DETECTABLE WARNING AREAS SHALL BE 24 INCHES IN LENGTH AND COVER THE COMPLETE WIDTH OF THE RAMP AREA ONLY.
4. THE DETECTABLE WARNING AREA SHALL BE INCLUDED IN THE COST OF THE CONCRETE CURB RAMP.
5. RAMP SLOPES SHALL NOT BE STEEPER THAN 12:1. THE DETECTABLE WARNING AND WELL AREA SLOPES SHALL NOT BE STEEPER THAN 20:1.



CITY of DELTA  
360 MAIN STREET  
DELTA, CO 81416

## DETECTABLE WARNING FOR CURB RAMP

DATE: OCTOBER 2009 SHEET R19 OF 30